# SPICORE Company

Commercial Outdoor and Indoor Roto-Molded Playground Parts

THE REPORT OF



165 Stoneman Drive Shallow Lake, Ontario, Canada spiplastics.com

To Order: 800.269.6533



Copyright © 2022, SPI Plastics. Revised April 2022. All rights reserved.

# YOUR LEADER in roto-molded playaround parts.

Whether you are interested in a playground climber, slide, or tube, we've worked hard to provide you with unique roto-molded plastic parts to help you create a spectacular playground. Our selection of commercial playground pieces are designed with world-wide safety standards in mind and are available for both indoor and outdoor use.

Play Accessories
Panels
Climbers
Roofs
Slides
Colors

# Play Accessories Indoor & Outdoor Play Accessories



## PLAY ACCESSORY DETAILS

- Indoor and outdoor applications
- Made from durable, roto-molded plastic
- Dimensions and weights are approximate
- Visit spiplastics.com for specification sheets

### Frog Rider RA,FR,N/B

Dimensions: 35" l x 21" w x 23" h (88.9 cm x 53.3 cm x 58.4 cm) Weight: 29 lbs (13.2 kg)

Spring Stand: RA,SPRING Stationary Base: HW,STAND,WH/FR



### Frog Rider RA,FR,N/B

Dimensions: 35" l x 21" w x 23" h (88.9 cm x 53.3 cm x 58.4 cm) Weight: 29 lbs (13.2 kg)

Spring Stand: RA,SPRING Stationary Base: HW,STAND,WH/FR

RA,FR,N/B and RA,SPRING



# Play Accessories Indoor & Outdoor Play Accessories





### Triple Toss TRT-03

Ages: 2-12 Dimensions: 48" l x 40" w x 36" h (121.9 cm x 101.6 cm x 91.4 cm) Weight: 45 lbs (20 kg) Only available in Blue (BL), Green (GR), and Tan (TA)



ADA ACCESSIBLE Adventure Table ADV,TABLE Ages: 2-12 Dimensions: 73.5" | x 31" w x 32" h (186.9 cm x 78.7 cm x 81.3 cm) Weight: 80 lbs (36.3 kg)



**Steering Wheel** SW Dimensions: 13" diameter x 6" h (33 cm diameter x 15.2 cm) Weight: 3 lbs (1.4 kg)



**Stepping Stone** STEPSTONE Dimensions: 14" diameter x 8" h (35.6 cm diameter x 20.3 cm) Weight: 5 lbs (2.3kg)

# PRIVATE LABEL OPTION

### **Sneaker Keepers**

	Single Component (6 Openings)	Sneaker Keeper Cap	Horizontal Sneaker Keeper (18 Openings) 3 components + cap	Horizontal Sneaker Keeper (24 Openings) 4 components + cap
Part No.	SKS	SKS,CAP	SKS,3-RISE	SKS,4-RISE
Dimensions	53" l x 13" w x 14.5" h (135 cm x 33 cm x 36 cm)	13.5"l x 47.25" w x 26"h (34.3 cm x 120 cm x 66 cm)	53" l x 13" w x 43" h (135 cm x 33 cm x 109 cm)	53"   x 13" w x 54" h (135 cm x 33 cm x 137 cm)
Weight	20 lbs (9.1 kg)	15 lbs (6.8 kg)	100 lbs (45.4 kg)	120 lbs (54.4 kg)



# Play Accessories Transition and Elbow Components




### T-Tube TT30

Dimensions: 51.5" l x 41.5" w x 31.75" h (131 cm x 105 cm x 81 cm) Weight: 78 lbs (35.4 kg)



Diameter: 30" (72.6 cm) Angle: 30° Weight: 65 lbs (29.5 kg)





**Junction Cube** JC30 Dimensions: 55.5" | x 55.5" w x 40.5" h (141 cm x 141 cm x 118 cm) Weight: 100 lbs (45.4 kg)



**24" 90° Elbow** E2490 Diameter: 24" (61 cm) Angle: 90° Weight: 35 lbs (15.9 kg)



**Turbo Junction** JCTURBO Dimensions: 48.3" | x 46.6" w x 38.4" h (123 cm x 118 cm x 98 cm) Weight: 105 lbs (47.6 kg)



Diameter: 30" (72.6 cm) Angle: 45° Weight: 75 lbs (34 kg)




**24" 30° Elbow** E2430 Diameter: 24" (61 cm) Angle: 30° Weight: 28 lbs (12.7 kg)



**30" 90° Elbow** E3090 Diameter: 30" (72.6 cm) Angle: 90° Weight: 65 lbs (29.5 kg)

# Play Accessories Tubes & Tube Components

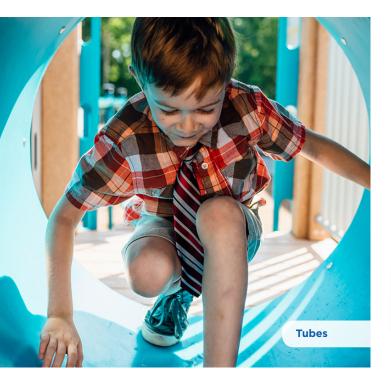



- Utilize crawl tubes, incline crawl tubes, elbow crawls, and more!
- Contact us for a customized design



### **Full Tubes**

- 24" or 30" diameter options
- All feature a 3" bell
- Part numbers in table below



Flanged Tube Exit EE30 Diameter: 30" (76.2 cm) Length: 39" (99.1 cm) Weight: 45 lbs (20.4 kg) Includes 4" bell



**Straight Flange** STRF Diameter: 34.5" (87.6 cm) Weight: 15 lbs (6.8 kg)

	24" Full 2' Tube	24" Full 7' Tube	30" Full 2' Tube	30" Full 5' Tube	30" Full 6' Tube	30" Full 7' Tube
Part No.	24X2FTB	24X7FTB	30X2FTB	30X5FTB	30X6FTB	30X7FTB
Diameter	24" (61 cm)	24" (61 cm)	30" (76.2 cm)	30" (76.2 cm)	30" (76.2 cm)	30" (76.2 cm)
Length	24" (61 cm)	84" (213.4 cm)	24" (61 cm)	60" (152.4 cm)	72" (182.9 cm)	84" (213.4 cm)
Weight	30 lbs (13.6 kg)	80 lbs (36.3 kg)	42 lbs (19 kg)	100 lbs (45.4 kg)	105 lbs (47.6 kg)	112 lbs (50.8 kg)

# Panels Activity Panels



## ACTIVITY PANEL DETAILS

- Dimensions: 43" x 41" (109 cm x 104 cm)
- Varying Depths
- Dimensions and weights are approximate
- Not all panels are suitable for outdoor use





C-Force Panel AC,CFORCE Depth: 5" (12.7 cm) Weight: 30 lbs (13.6 kg)



**Mirror Panel** AC,MIRROR Depth: 3" (7.6 cm) Weight: 25 lbs (11.3 kg)



Driving Panel AC,DRIVING Depth: 8" (20.3 cm) Weight: 30 lbs (13.6 kg)



Sign Language Panel AC,SIGNLANGUAGE Depth: 3" (7.6 cm) Weight: 25 lbs (11.3 kg)



**Gears Panel** AC,GEARS Depth: 5" (12.7 cm) Weight: 30 lbs (13.6 kg)



**Tic-Tac-Toe Panel** AC,TIC-TAC-TOE Depth: 8" (20.3 cm) Weight: 35 lbs (15.9 kg)



**Gyro Panel** AC,GYRO Depth: 5" (12.7 cm) Weight: 25 lbs (11.3 kg)



**Tic-Tac-Toe Blocks** TTT9R Set of 9 Items Bagged Weight: 15 lbs (6.8 kg)

# Panels Barrier, Entry, & Bubble Panels



# BARRIER & ENTRY PANEL DETAILS

- Safe entry into a tube slide or crawl tube
- Recessed on both sides
- Chamfered edges
- Dimensions and weights are approximate

24" Clear Bubble Window B24,CL

Diameter: 24" (61 cm) Dimensions: 28" x 28" x 10" rise (71 cm x 71 cm x 25 cm rise) Weight: 5 lbs (2.3 kg) Hole Diameter: 24" (61 cm)

### 30" Clear Bubble Window B30,CL

Diameter: 30" (76.2 cm) Dimensions: 35" x 35" x 10" rise (89 cm x 89 cm x 25 cm rise) Weight: 7 lbs (3.2 kg) Hole Diameter: 30" (76.2 cm)



**Clear Bubble Window Panel** BP24C Dimensions: 39" x 31" (99 cm x 78.8 cm) Depth: 10" (25.4 cm) Weight: 20 lbs (9.1 kg) Hole Diameter: 24" (61 cm)



Flat Panel FP30,2002 Dimensions: 43" x 41" (109 cm x 104 cm) Depth: 3" (7.6 cm) Weight: 20 lbs (9.1 kg) Hole Diameter: 30" (76.2 cm)



**Clear Bubble Window Panel** BP3OC Dimensions: 43" x 41" (109 cm x 104 cm) Depth: 10" (25.4 cm) Weight: 27 lbs (12.2 kg) Hole Diameter: 30" (76.2 cm)



Activity Panel ACTP,2002 Dimensions: 43" x 41" (109 cm x 104 cm) Depth: 2.5" (6.4 cm) Weight: 20 lbs (9.1 kg) Opening Size: 28.5" Square (72.4 cm)




Flat Panel P24,2002 Dimensions: 39" x 31" (99 cm x 78.8 cm) Depth: 3" (7.6 cm) Weight: 15 lbs (6.8 kg) Hole Diameter: 24" (61 cm)



Ventilation Panel FS,SP5 Dimensions: 43" x 41" (109 cm x 104 cm) Depth: 3" (7.6 cm) Weight: 20 lbs (9.1 kg)

# **Climbers** Outdoor Play Climbers

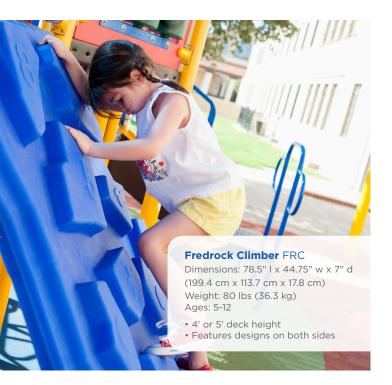



### **Cliff Hanger** CLIFFHANGER

Dimensions: 67" at widest x 8" at smallest x 68.25" l (170 cm x 20 cm x 173.5 cm) Weight: 100 lbs (45.4 kg) Ages: 5-12

 $\bullet$  Uses  $3\%^{\prime\prime}$  (9 cm) or smaller diameter pipes (not included) inside or bracket to outside vertical mounting area

Can be designed in multiple configurations

Individual plastic component only



**Bedrock Climber** BRC Dimensions: 66" l x 36" w x 6" d (167.6 cm x 91.4 cm x 15.2 cm) Weight: 65 lbs (29.5 kg) Ages: 5-12 Deck Height: 4' (1.2 m)



**Bedrock Cap** BRC,CAP Dimensions: 68.5" I x 6" w x 6" d (174 cm x 15.2 cm x 15.2 cm) Weight: 12 lbs (5.4 kg)



Dino-Mite<sup>™</sup> Climber DINO6 Dimensions: 62" | x 34" w x 90" h (157.5 cm x 86.4 cm x 228.6 cm) Weight: 175 lbs (79.4 kg) Ages: 5-12 Deck Height: 5' (1.5 m) and 6'

### Link™ LINK

Dimensions: 42" | x 12" w x 14.5" h (105.7 cm x 30.5 cm x 36.8 cm) Weight: 15 lbs (6.8 kg)

- Endless configurations
- Fits 1.25" 3.5" (3.3 cm 9.1cm) pipe diameters (not included)
- Drainage flow built into the design
- Individual plastic component only



# **Roofs** Square & Hexagon Deck Roofs

### PLAYGROUND ROOF DETAILS

- Easily installed
- Provides shade to playgrounds
- 4 unique designs available
- Dimensions and weights are approximate



### 4' Pyramid Roof PR4,2002

Dimensions: 53.5" l x 53.5" w x 23" h (135.9 cm x 135.9 cm x 58.5 cm) Weight: 60 lbs (27.3 kg)

### 5' Pyramid Roof PR5,DW

Dimensions: 60" l x 60" w x 22" h (152.4 cm x 152.4cm x 55.9 cm) Weight: 80 lbs (36.3 kg)

### Gable Roof GABLEROOF

Dimensions: 56" l x 54.75" w x 27" h (142 cm x 131 cm x 68 cm) Weight: 65 lbs (29.5 kg)



**Cupola Roof** CUPOLAROOF Dimensions: 70" l x 70" w x 44" h (178 cm x 178 cm x 112 cm) Weight: 132 lbs (60 kg)



### 8' Hex Roof PR8

Dimensions: Outside: 109.5" x 109.5" x 39.75" h (278.4 cm x 278.4 cm x 101 cm) Inside: 92" x 92" (234 cm x 234 cm) Weight: 170 lbs (77 kg)



# 1° DRAFT SYSTEM

The face of the slide features a 1° draft so the top of the slide face contacts the deck first.

### Used By:

3', 4', and 5' Flat Slides
4' and 5' Curve Slides
6' Spiral Slide
Starglide Hood
Starglide Single Entrance



# CONCAVE SYSTEM

The face of the slide is concave. When placed against the face of the deck, the outer edges of the slide contact the deck first.

### Used By:

- 2' Flat Slide
- 3' Curve Slide
- 3', 4', and 5' Triple Rail Slide
  - 4', 5', and 6' Wave Slide
  - 6' Spiral Slide with Hood

# Slides Slide Hoods







TRS,HOOD48

### **Slide Hoods**

	Part No.	Dimensions	Weight
Double Wall Slide Hood	DWFS,HOOD	40" l x 38" h x 16" d (101.6 cm x 96.5 cm x 40.6 cm)	28 lbs (13 kg)
36″ Double Wall Slide Hood	DWFS,HOOD36	36"   x 44" h x 15" d (91.4 cm x 112 cm x 38.1 cm)	30 lbs (14 kg)
Triple Rail Slide Hood	TRS,HOOD	45" l x 30" h x 16" d (114.3 cm x 76.2 cm x 40.6 cm)	27 lbs (12.3 kg)
48" Triple Rail		48" l x 33" h x 14.5" d	30 lbs
Slide Hood	TRS,HOOD48	(121.9 cm x 83.8 cm x 36.8 cm)	(13.6 kg)

# Slides One-Piece Slides





### Curved Slide (Right Turn Only)

	Part No.	Deck Height	Width	Bed Width	Length	Weight
3′ 90° Curved Slide	3CURVED,N	36" (91.4 cm)	24" (61 cm)	18" (45.7 cm)	70" (177.8 cm)	65 lbs (29.5 kg)
4' Curved Slide	4CURVED	48" (121.9 cm)	24" (61 cm)	18" (45.7 cm)	111" (281.9 cm)	90 lbs (41 kg)
5' Curved Slide	5CURVED	60" (152.4 cm)	24" (61 cm)	18" (45.7 cm)	130" (330.2 cm)	110 lbs (50 kg)


### **Double Wall Flat Slide**

	Part No.	Deck Height	Width	Bed Width	Length	Weight
2' Double Wall Flat Slide	2DWFS	24" (61 cm)	24" (61 cm)	17" (43.2 cm)	58" (147.3 cm)	40 lbs (18.2 kg)
3' Double Wall Flat Slide	3DWFS	36" (91.4 cm)	23.5" (59.7 cm)	17.5" (44.5 cm)	90″ (228.6 cm)	65 lbs (29.5 kg)
4' Double Wall Flat Slide	4DWFS	48" (121.9 cm)	23.5" (59.7 cm)	17.5" (44.5 cm)	116" (294.6 cm)	80 lbs (36.3 kg)
5' Double Wall Flat Slide	5DWFS	60" (152.4 cm)	23.5" (59.7 cm)	17.5" (44.5 cm)	132" (335.3 cm)	100 lbs (45.4 kg)

### **Double Wall Wave Slide**

	Part No.	Deck Height	Width	Bed Width	Length	Weight
4' Double Wall Wave	4DWWS	48" (121.9 cm)	24" (61 cm)	17" (43.2 cm)	108" (274.3 cm)	85 lbs (38.5 kg)
5' Double Wall Wave	5DWWS	60" (152.4 cm)	24" (61 cm)	17" (43.2 cm)	128" (325.1 cm)	90 lbs (40.8 kg)
6' Double Wall Wave	6DWWS,2002	72" (183 cm)	24.5" (62.2 cm)	17.5" (44.5 cm)	145" (368.3 cm)	110 lbs (50 kg)

# Slides Triple Rail Slides

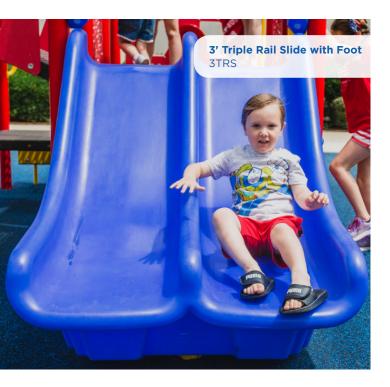

### TRIPLE RAIL SLIDE DETAILS

- Two slide bedways in one molded unit
- 4' and 5' options have one concave and one convex slide bedway
- Molded-in foot (except 3' without foot)
- Rounded corners (except 3' without foot)



### **Triple Rail Slide**

	Part No.	Deck Height	Width	Each Bed Width	Length	Weight
3′ Triple Rail Slide with Foot	3TRS	36" (91.4 cm)	42" (107.7 cm)	17" (43.2 cm)	60" (152.4 cm)	80 lbs (36.3 kg)
3' Triple Rail Slide without Foot	3TRS,OLD	36" (91.4 cm)	36" (91.4 cm)	13" (33 cm)	78" (198 cm)	75 lbs (34 kg)
4' Triple Rail Slide	4TRS	48" (121.9 cm)	41" (104 cm)	17" (43.2 cm)	97.25" (247 cm)	130 lbs (59 kg)


### **Triple Rail Wave Slide**

	Part No.	Deck Height	Width (At Deck)	Width (At Exit)	Each Bed Width	Length	Weight
5' Triple Rail Wave Slide	5TRS	60" (152 cm)	41" (104 cm)	55.5" (141 cm)	16.25" (41.3 cm)	117" (297 cm)	150 lbs (68 kg)





# **Slides** Spiral & Tube Slides

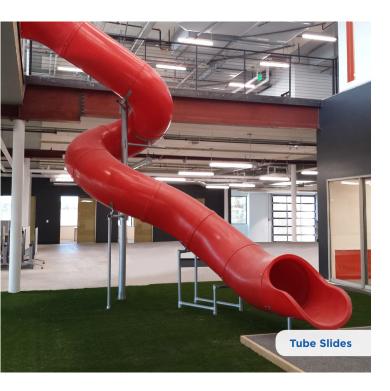



Width: 45.625" (1.2 m) Height: 110.625" (2.8 m) Weight: 150 lbs (81.6 kg) (slide), 18 lbs (8.2kg) (hood) Only available in Blue (BL), Dark Red (DR), Dark Yellow (DY), Green (GR), and Tan (TA)



### **Custom Tube Slides**

- Available in 30" diameters
- Molded in bell joints allow for connections for additional length or use with elbows
- Straight, curve, hook, veer, and snake tube slide designs available
- Contact us for a custom design

### Installation Suggestions:

- Adventure Parks Backyards
- Campgrounds
- Home/Cottages • Boat Docks
- Office
- Tree Houses
- Fire Stations

Churches

Daycares

### **Custom Spiral Tube Slides**

- Available in 30" diameters
- Molded in bell joints allow for connections for additional length or use with elbows
- Contact us for a custom design

### Installation Suggestions:

- Adventure Parks
- Campgrounds
- Home/Cottages Boat Docks
- Office • Tree Houses
- Fire Stations Daycares

Backyards

Churches

### Spiral Slide DE-4437 + Slide Hood DE-4437-H Deck Height: 68.5" (1.7 m)

Visit spiplastics.com for specification sheets on each product! | 13

# **Slides** Starglide Sectional Slides




### Starglide Triple Bed Slides

Starglide 5' Triple Bed SlideStraight/Straight/Straight/Veer RightSG,5TBS,SSS372.5 lbs (169 kg)Starglide 6' Triple Bed SlideStraight/Straight/Veer RightSG,6TBS,SSS473 lbs (214.5 kg)Starglide 7' Triple Bed SlideVeer Left/Straight/Veer RightSG,6TBS,VSV473 lbs (214.5 kg)Starglide 7' Triple Bed SlideStraight/Straight/Straight/StraightSG,7TBS,VSV519.5 lbs (236 kg)Starglide 8' Triple Bed SlideVeer Left/Straight/Veer RightSG,7TBS,VSV519.5 lbs (236 kg)Starglide 8' Triple Bed SlideStraight/Straight/Straight/StraightSG,8TBS,VSV519.5 lbs (236 kg)Veer Left/Straight/Veer RightSG,8TBS,VSV519.5 lbs (259.5 kg)572 lbs (259.5 kg)	Description	Configuration	Part No.	Weight
Veer Left/Straight/Veer RightSG,5TBS,VSV372.5 lbs (169 kg)Starglide 6' Triple Bed SlideStraight/Straight/Straight/StraightSG,6TBS,SSS473 lbs (214.5 kg)Veer Left/Straight/Veer RightSG,6TBS,VSV473 lbs (214.5 kg)Starglide 7' Triple Bed SlideStraight/Straight/Straight/StraightSG,7TBS,SSS519.5 lbs (236 kg)Veer Left/Straight/Veer RightSG,7TBS,VSV519.5 lbs (236 kg)Starglide 8' Triple Bed SlideStraight/Straight/Straight/StraightSG,8TBS,SSS572 lbs (259.5 kg)	Starglida El Tripla Rad Slida	Straight/Straight/Straight	SG,5TBS,SSS	372.5 lbs (169 kg)
Starglide 6' Triple Bed Slide       Veer Left/Straight/Veer Right       SG,6TBS,VSV       473 lbs (214.5 kg)         Starglide 7' Triple Bed Slide       Straight/Straight/Straight       SG,7TBS,SSS       519.5 lbs (236 kg)         Veer Left/Straight/Veer Right       SG,7TBS,VSV       519.5 lbs (236 kg)         Starglide 8' Triple Bed Slide       Straight/Straight/Straight       SG,8TBS,SSS       572 lbs (259.5 kg)	Starglide 5 Triple Bed Slide	Veer Left/Straight/Veer Right	SG,5TBS,VSV	372.5 lbs (169 kg)
Veer Left/Straight/Veer Right     SG,6TBS,VSV     473 lbs (214.5 kg)       Starglide 7' Triple Bed Slide     Straight/Straight/Straight     SG,7TBS,SSS     519.5 lbs (236 kg)       Veer Left/Straight/Veer Right     SG,7TBS,VSV     519.5 lbs (236 kg)       Starglide 8' Triple Bed Slide     Straight/Straight/Straight     SG,8TBS,SSS     572 lbs (259.5 kg)	Stavalida <i>Cl</i> Tvipla Dad Clida	Straight/Straight/Straight	SG,6TBS,SSS	473 lbs (214.5 kg)
Starglide 7' Triple Bed Slide         Veer Left/Straight/Veer Right         SG,7TBS,VSV         519.5 lbs (236 kg)           Starglide 8' Triple Bed Slide         Straight/Straight/Straight         SG,8TBS,SSS         572 lbs (259.5 kg)	Starglide 6" Triple Bed Slide	Veer Left/Straight/Veer Right	SG,6TBS,VSV	473 lbs (214.5 kg)
Veer Left/Straight/Veer Right         SG,7TBS,VSV         519.5 lbs (236 kg)           Straight/Straight/Straight         SG,8TBS,SSS         572 lbs (259.5 kg)           Starglide 8' Triple Bed Slide         Straight/Straight         SG,8TBS,SSS	Charalida 7/ Tripla Dad Clida	Straight/Straight/Straight	SG,7TBS,SSS	519.5 lbs (236 kg)
Starglide 8' Triple Bed Slide	Starglide 7 Triple Bed Slide	Veer Left/Straight/Veer Right	SG,7TBS,VSV	519.5 lbs (236 kg)
	Stavalida Ol Tvipla Dad Slida	Straight/Straight/Straight	SG,8TBS,SSS	572 lbs (259.5 kg)
	Starglide 8 Triple Bed Slide	Veer Left/Straight/Veer Right	SG,8TBS,VSV	572 lbs (259.5 kg)

### **Starglide Sectional Slides**

Description	With Slide Hood Part No.	Weight	Without Slide Hood Part No.	Weight
Starglide 3' Straight	SG,3STR	109.5 lbs (50 kg)	SGO,3STR	84.5 lbs (38 kg)
Starglide 4' Straight	SG,4STR	127 lbs (58 kg)	SGO,4STR	102 lbs (46 kg)
Starglide 5' Straight	SG,5STR	142.5 lbs (65 kg)	SGO,5STR	117.5 lbs (53 kg)
Starglide 5' Wave	SG,5W	142.5 lbs (65 kg)	SGO,5W	117.5 lbs (53 kg)
Starglide 5' Veer Left	SG,5VEER,L	142.5 lbs (65 kg)	SGO,5VEER,L	117.5 lbs (53 kg)
Starglide 5' Veer Right	SG,5VEER,R	142.5 lbs (65 kg)	SGO,5VEER,R	117.5 lbs (53 kg)
Starglide 6' Straight	SG,6STR	176 lbs (80 kg)	SGO,6STR	151 lbs (68.5 kg)
Starglide 6' Wave	SG,6W	176 lbs (80 kg)	SGO,6W	151 lbs (68.5 kg)
Starglide 6' Veer Left	SG,6VEER,L	176 lbs (80 kg)	SGO,6VEER,L	151 lbs (68.5 kg)
Starglide 6' Veer Right	SG,6VEER,R	176 lbs (80 kg)	SGO,6VEER,R	151 lbs (68.5 kg)
Starglide 7' Straight	SG,7STR	192 lbs (87 kg)	SGO,7STR	166.5 lbs (75.5 kg)
Starglide 7' Wave	SG,7W	192 lbs (87 kg)	SGO,7W	166.5 lbs (75.5 kg)
Starglide 7' Veer Left	SG,7VEER,L	192 lbs (87 kg)	SGO,7VEER,L	166.5 lbs (75.5 kg)
Starglide 7' Veer Right	SG,7VEER,R	192 lbs (87 kg)	SGO,7VEER,R	166.5 lbs (75.5 kg)
Starglide 7' Snake Left	SG,7SNAKE,L	192 lbs (87 kg)	SGO,7SNAKE,L	166.5 lbs (75.5 kg)
Starglide 7' Snake Right	SG,7SNAKE,R	192 lbs (87 kg)	SGO,7SNAKE,R	166.5 lbs (75.5 kg)
Starglide 7' Turn Left	SG,7TURN,L	192 lbs (87 kg)	SGO,7TURN,L	166.5 lbs (75.5 kg)
Starglide 7' Turn Right	SG,7TURN,R	192 lbs (87 kg)	SGO,7TURN,R	166.5 lbs (75.5 kg)
Starglide 8' Straight	SG,8STR	209 lbs (95 kg)	SGO,8STR	184 lbs (83.5 kg)
Starglide 8' Wave	SG,8W	209 lbs (95 kg)	SGO,8W	184 lbs (83.5 kg)
Starglide 8' Veer Left	SG,8VEER,L	209 lbs (95 kg)	SGO,8VEER,L	184 lbs (83.5 kg)
Starglide 8' Veer Right	SG,8VEER,R	209 lbs (95 kg)	SGO,8VEER,R	184 lbs (83.5 kg)
Starglide 8' Turn Left	SG,8TURN,L	209 lbs (95 kg)	SGO,8TURN,L	184 lbs (83.5 kg)
Starglide 8' Turn Right	SG,8TURN,R	209 lbs (95 kg)	SGO,8TURN,R	184 lbs (83.5 kg)
Starglide 8' Snake Left	SG,8SNAKE,L	209 lbs (95 kg)	SGO,8SNAKE,L	184 lbs (83.5 kg)
Starglide 8' Snake Right	SG,8SNAKE,R	209 lbs (95 kg)	SGO,8SNAKE,R	184 lbs (83.5 kg)

# **Slides** Sectional Slide Parts

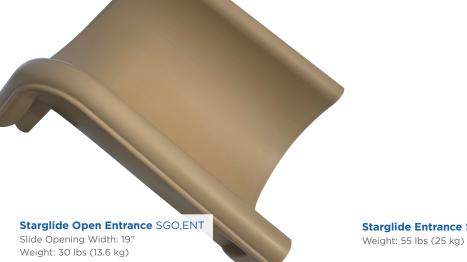






**Starglide Exit** SG,EXIT Weight: 54.5 lbs (24.7 kg)



**Starglide Straight** SG,STRAIGHT Weight: 17.6 lbs (8 kg)



**Starglide Straight Double** SG,STR,DOUBLE Weight: 33 lbs (15 kg)



Starglide Turn Left: SG,TURN,LEFT Right: SG,TURN,RIGHT Weight: 33 lbs (15 kg)



**Starglide Support** SG,SUPPORT Weight: 6 lbs (7.25 kg)



Starglide Wave SG,WAVE Weight: 33 lbs (15 kg)



**Starglide Triple Bed Slide Entrance** SG,TBS,ENT Width: 81.5" Weight: 110 lbs (50 kg)

# **Color Options**



\*Spring Green and Holland Yellow not suitable for single wall parts. Colors shown are representations, inquire for color samples.

# Warranty

SPI Plastics, Inc. (SPI) provides a <u>1-Year Limited</u> <u>Warranty</u> for all polyethylene components. This warranty covers structural failure for the value of the product, not including freight charges or labor expense. This warranty does not cover vandalism or cosmetic issues (such as color fading).

# **CAD** Files

.DWG files and images for the various components listed in this catalogue are available for download. CAD files are AutoCAD 2002 compatible, but may work back to AutoCAD 14. Most files are drawn in solids but some complex components are drawn in surfaces and are not exact representations.

To access these files, please call us at 1.800.269.6533.

.

# Specifications Exxon LL DPE LL 8555 Polyethylene Resin

Resin Properties	Typical Value	Units	Test Based On
Density	0.936		ExxonMobil Method
	••••••		
Melt Index (190°C/2.16kg)	6.8	g/10 min	ASTM D1238
Thermal			
Deflection Temperature Under Load (DTUL) at 66psi - Unannealed	52	°C	ASTM D648
Deflection Temperature Under Load (DTUL) at 264psi - Unan- nealed	36	°C	ASTM D648
Peak Melting Temperature	126	°C	ASTM D3418
Molded Properties			
Tensile Strength at Yield (50mm/minute)	16	MPa	ASTM D638
Elongation at Yield (50mm/minute)	10		ASTM D638
Flexural Modulus - 1% Secant	570		ASTM D790B
Environmental Stress-Crack Resistance 10% Igepal, F50 100% Igepal, F50	50 >1000	hr hr	ASTM D1693A
Impact Strength			
-40°C, 3.18mm -40°C, 6.35mm	80 203	J J	ARM

### Additional Information

- All physical properties were measured on 3mm rotomolded samples unless a different value is shown, except for ESCR, which was measured on compression molded samples
- Tensile testing was conducted at a crosshead speed of 50 mm/min. The tensile strength reported refers to the maximum stress reached during the test
- Test procedures may be modified to accommodate operating conditions or facility limitations
- Meets FDA requirements
- UV-stabilized



165 Stoneman Drive Shallow Lake, Ontario, Canada

800.269.6533 **spiplastics.com** 



